



DIFFERENTIAL PRESSURE DERATING GUIDE FOR HS88 STATOR ELASTOMER



Temperature Derating

Elastomers lose some of their mechanical strength when they get hotter. For optimum service life, the maximum Operating Pressure across the power section should be reduced (derated) as the temperature increases. The derating factor increases with the temperature so to calculate the derated Operating Pressure at given application temperature, multiply the Maximum Operating Pressure by the derating factor.

Each stator's performance specification sheet shows the maximum Working Pressure, the maximum Off-Bottom Pressure and the maximum Operating Pressure (for the power section only).

Maximum Working Pressure	the maximum pressure that can be put across the power section before slip starts to occur.
Maximum Off-Bottom (OFF-BTM)	the pressure, at maximum flow rate, needed to overcome the internal mechanical and hydraulic friction in the power section.
Maximum Operating Pressure	= maximum Working Pressure – maximum OFF-BTM (i.e. the remaining pressure available for the drilling operation).

A typical derating chart is shown below.

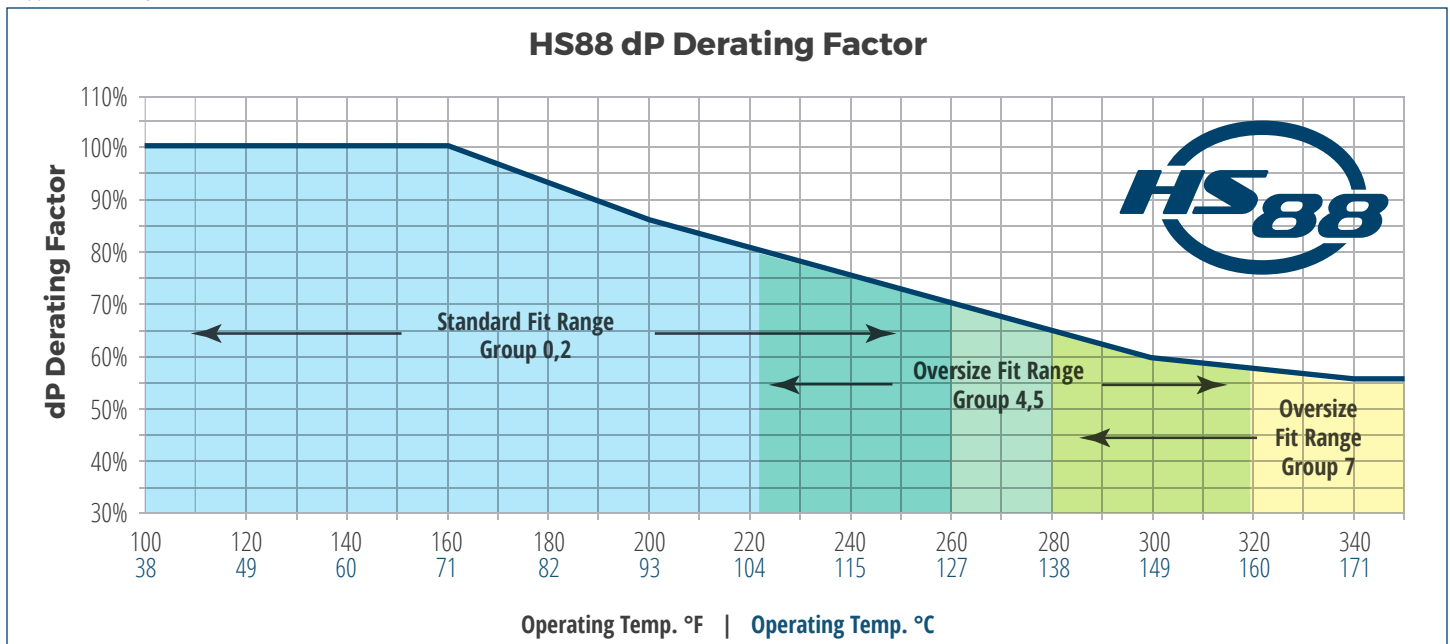

PV Fluid Products

pvfluid.com

For more information on PV elastomers, fit charts, derating curves, etc., please contact your local PV sales office.

PV Fluid Products Ltd.
Houston, TX, USA
Tel: +1 281-550-1500

PV Fluid Products Ltd.
Calgary, AB, Canada
Tel: +1 403-640-0331

PV Fluid Products Ltd.
Nisku, AB, Canada
Tel: +1 780-955-8800

PV Fluid Products GmbH
Wolfenbüttel, Germany
Tel: +44 (0) 1625-505912

PV Fluid Products UK Ltd.
Macclesfield, Cheshire UK
Tel: +44 (0) 1625-505912

PV International
Bridgetown, Barbados
Tel: +1 246-427-8617

PV Dubai
UAE
Tel: +44 (0) 1625-505912