



# SPECIFICATION SHEET FOR: 4 3/4" 7:8 LOBE 3.7 STAGE HS88 GROUP 0

Metric

**PV475737-HS-0**


Rotor Details	
Overall Length (mm)	5455
Head Length (mm)	152
Head Diameter (mm)	80
Contour OD (mm)	79.2
Ecc (in)	0.177
C to V (in)	2.767
Weight (kg)	135
Std Connection	0

Recommended Operating Range	
Flow Rate	379 Lpm-1325 Lpm
No Load RPM	37-130
Displacement	0.098 revs/l
Max Working Pressure	75 bar
Max Off-BTM Pressure	13 bar
Max Operating Torque	9659 N-m
Torque Slope	6.805 ft-lbs/psi
Max Operating pressure = Max Working kpa - Max Off-BTM kpa	
For Maximum Life do not exceed 72 bar differential.	

Stator Details	
Overall Length (mm)	5969
Tube OD (mm)	121
Tube ID (mm)	99
Alternate OD (mm)	127
Std Cutbacks (mm)	203
Weight (kg)	255

Sizing and Fit Information	
Vector Minor (in)	2.762
Shop Fit @ 21°C	0.005 Compression
Temp Correction Factor*	3.6
* Temp correction factor is the degrees (C) required to change the stator size by .001" on diameter.	

## Theoretical performance with water at Operating Temperature

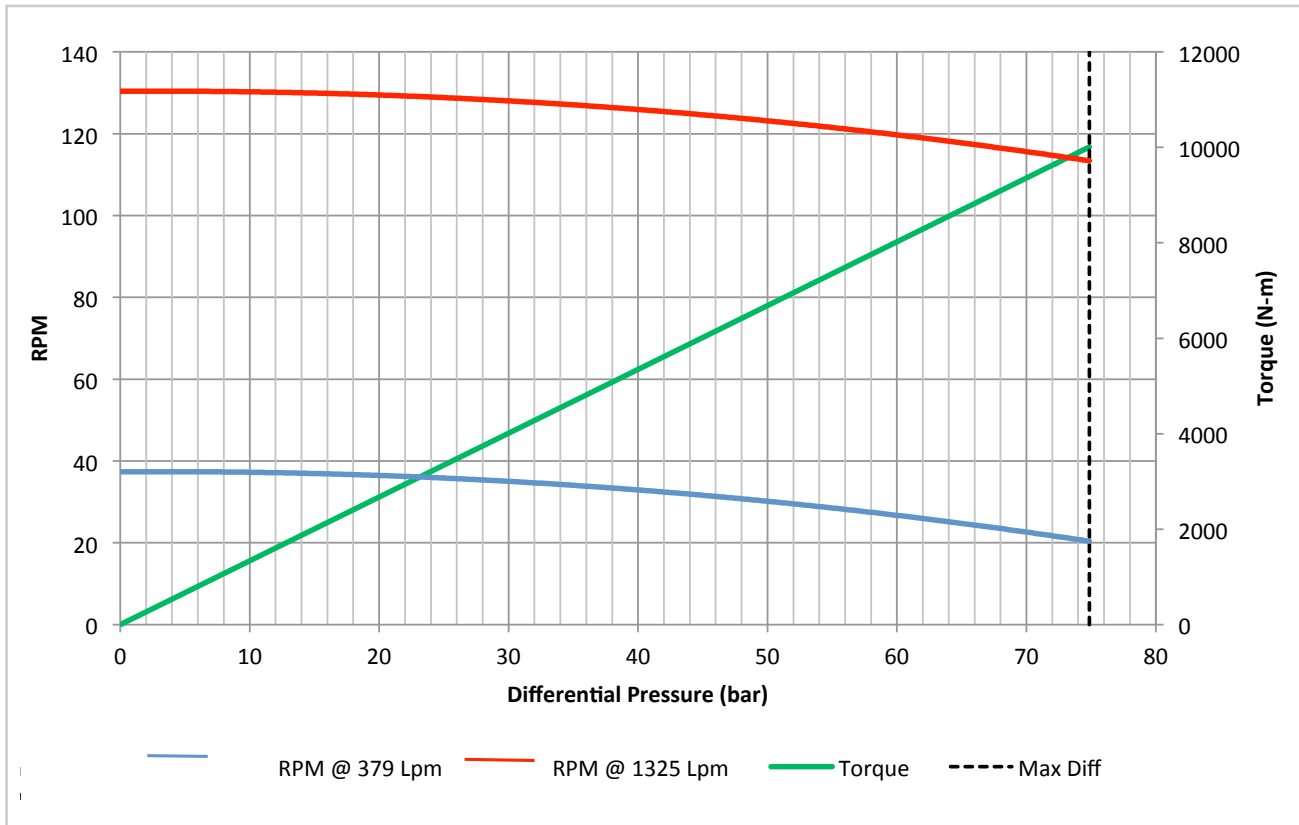

Performance curves for reference only. Data is based on new rotor and stator nominal dimensions. Performance downhole may vary based on drilling conditions and rotor/stator fit. Operating over the specified limits may result in damage to the power section and/or connected components. Information is subject to change.